



# BEHAVIORAL SAFETY PRODUCTS

## SAFE → AESTHETIC → FUNCTIONAL

### LIGATURE RESISTANT SHOWER VALVE, HANDLE AND ESCUTCHEON PLATE

#SV230


Features easy grip, ligature resistant handle that meets ADA pull force requirements, and does not require pinch and grasp to turn, anti-friction ring maintains tight fit with smooth handle operation, redundant sealing to prevent moisture migration, escutcheon plate and handle with variable rough-in, anti-scald mechanism, ASSE 1016 & UPC approved shower valve and ADA compliant. Heavy, all metal construction designed for maximum strength and protection from abuse. Polished chrome finish.

#### SPECIFICATIONS

- Easy grip, ligature resistant handle.
- Anti-friction ring maintains tight fit with smooth handle operation.
- Redundant sealing to prevent moisture migration.
- Escutcheon plate & handle with variable rough-in.
- Valve body with integral stops.
- Anti-scald mechanism.
- Adjustable temperature limit stop.
- Brass Valve body, Zinc Handle and Escutcheon Plate, with polished chrome finish.
- Piston type pressure balancing/ceramic, regulating cartridge assembly with built-in check valves.
- Can be installed back to back.
- Roughing-in template included.
- Four port valve with 1/2" female copper sweat inlets and shower outlet.
- 1/2" NPT female tub outlet.
- Maximum operating water pressure: 80 PSI static.
- Minimum operating water pressure: 20 PSI flowing.
- Maximum operating water temp: 140° F.
- Minimum operating water temp: 40° F.



#### ROUGH IN

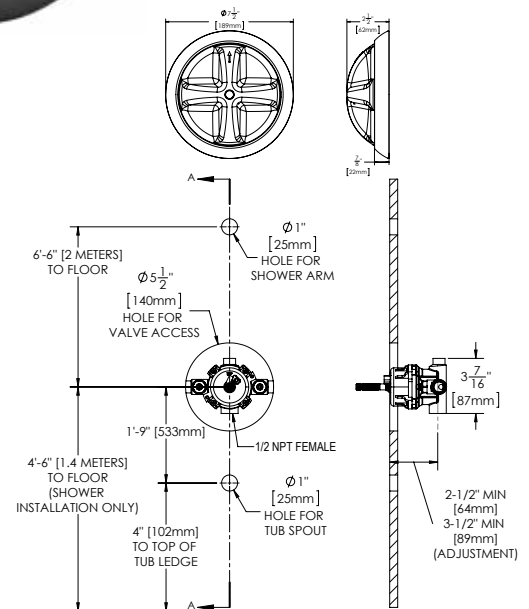

#### CERTIFICATIONS

- ADA compliant.
- This product is certified by IAPMO to meet
  - UPC • ASME A112.18.1/CSA B125.1-12 • ASSE 1016
  - Approved in the NYS Office of Mental Health Patient Safety Standards, Materials and Systems Guidelines.
  - Approved in the FGI Design Guide for the Built Environment of Behavioral Health Facilities.

706-705-1500

besafepro.com