

BEHAVIORAL SAFETY PRODUCTS SAFE-AESTHETIC-FUNCTIONAL

LIGATURE RESISTANT EXHAUST GRILLE

#FG450

INSTALLATION, MAINTENANCE & OPERATION INSTRUCTIONS

Generally, bathroom exhaust grilles and/or supply grilles in psychiatric/behavioral facilities represent ligature or "tie off" points, enabling a patient to attempt suicide. The Ligature Resistant Retrofit Exhaust/Supply Grille is designed to replace existing grilles that are not ligature resistant. This grille is manufactured with stainless steel and features a 3/64" thick perforated face with 1/8" holes on staggered centers. The unit itself is only 3/8"deep to prevent unsightly protrusions or drops from the ceiling and all corners and edges are radiused for further safety. The 3/8"depth also allows air to flow between the existing ceiling and grille, therefore creating the free air with smaller openings to flow in excess of the standard 4-6inch exhaust grille. The unit has more than 40% free air. The fact that it is surface mounted with no interior flanges makes it an easy installation over the existing opening without alteration (favored by plant operations personnel). Comes standard in white powder coat finish.

SPECIFICATIONS

- Stainless steel construction
- More than 40% free air
- White powder coat exterior
- Unit secured with tamper resistant stainless-steel screws (included)




LIGATURE RESISTANT EXHAUST GRILLE

PAGE 2


IMPORTANT

- Do not over-tighten any connections or damage may occur.
- Be sure to read instructions thoroughly before beginning installation.

TOOLS AND SUPPLIES:

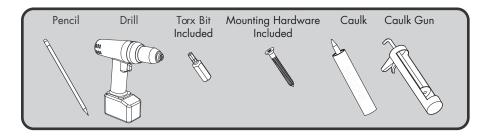

ROUGH IN DIMENSIONS

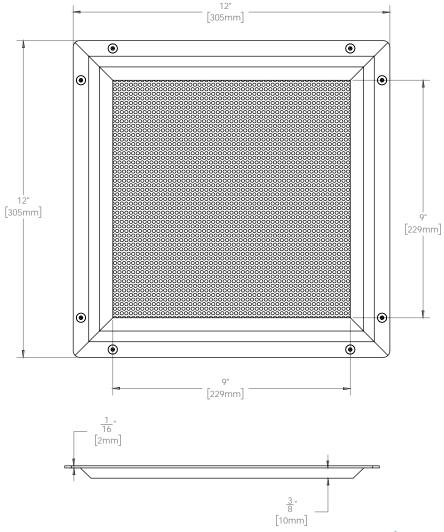

besafepro.com


706-705-1500




INSTALLATION INSTRUCTIONS - 1

PAGE 3

Place the grille against the desired mounting location. Ensure mounting location is capable of supporting the product in use. Use pencil to mark the location of the 8 mounting screws.

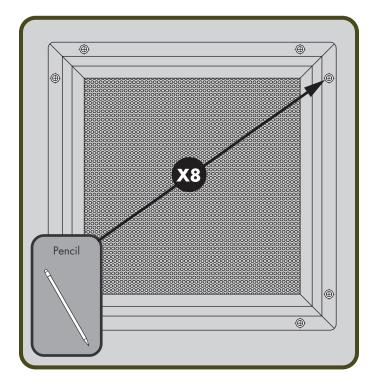

2 Use the appropriate drill bit to drill 8 holes on the previously marked location.

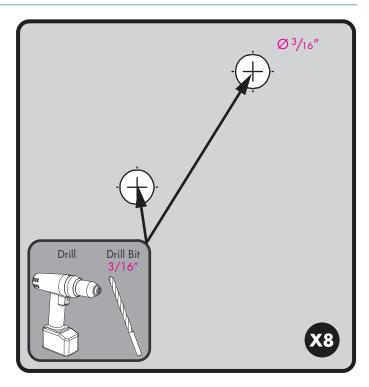




INSTALLATION INSTRUCTIONS - 2

PAGE 4


Use the driver bit and the mounting hardware provided to secure the grille. Ensure the mounting structure and mounting hardware can safely support the product in use. If mounting on drywall and not to stud, use the appropriate anchors and fasteners for application. Recommend screw in easy anchor or equal for drywall.

NOTE

Make sure the screws sit flush to 1/64" below mounting surface.

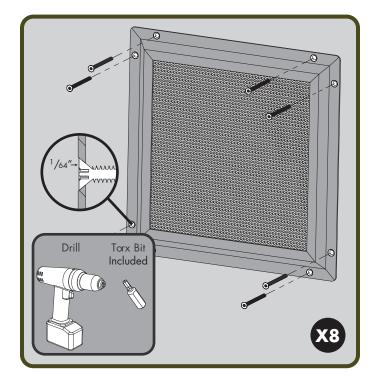

4 BSP recommends the edge of the grille be caulked with an adhesive latex caulk to seal the edge and prevent tampering.

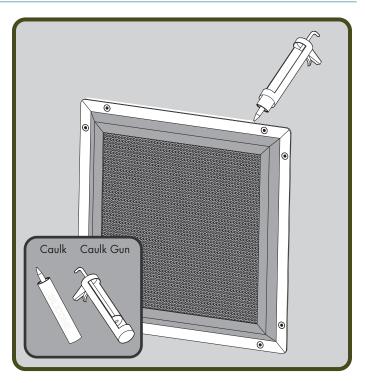



CARE & CLEANING

PAGE 5

• Your new Product is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. The use of harsh chemicals and abrasives on any of the custom finish products may damage the finish and void the product warranty. Please be sure to only use approved cleaners.

WAIVER & DISCLAIMER

This waiver-disclaimer is attached to and made a part of the written contract to purchase these products for use in psychiatric and correctional facilities. Such fixtures and products are purchased to reduce the risk of self-imposed death or injury to patients or clients in such facilities, but are NOT represented as able to prevent such death or injury.

Behavioral Safety Products, LLC ("BSP") as the seller and Speakman Company as the manufacturer of these products have not, and will not represent or warrant to the purchaser shown in this contract ("Purchaser") that its fixtures and products will prevent death or injury in any case whatsoever.

BSP and Speakman Company make no express or implied warranty with respect to the preventative quality of its products, but merely represent that the use of such products tends to reduce deaths and injuries by patients or clients who are subject to meticulous screening processes and diligent supervision on the part of the facility housing them.

Purchaser acknowledges the foregoing disclaimer and waives any and all claims against BSP and Speakman Company as to express or implied warranties of fitness for any purpose whatsoever.

IMPORTANT

- Do not over tighten any connections or damage may occur
- Be sure to read instructions thoroughly before beginning installation.