


## 5-Point Ligature Resistant Door Latch Set–Cylindrical

#DH415

### Specification

- ANSI Grade 1 heavy duty cylindrical with 5-point ligature resistant arch trim
- Backset 2-3/4" standard, 5" optional
- Door thickness: 1-3/4", other upon request
- Stainless steel arch trim: 2-5/8" projection
- Stainless steel plate: 9-5/8" x 2-13/16"
- Stainless steel deadlocking latch bolt: 1/2" throw
- Stainless steel ASA strike standard
- Tamper resistant mounting screws
- Handed, specify handing
- Cylinder options:  
Schlage® "C" keyway, brass 6-pin cylinder standard  
Best® SFIC available, 6- or 7-pin, with or without core  
Schlage® LFIC less core available  
Corbin® LFIC less core available  
High security cylinder available, Townsteel "L" keyway, 6-pin
- Keying: KD standard, KA, MK, GMK, GGMK and construction keying available

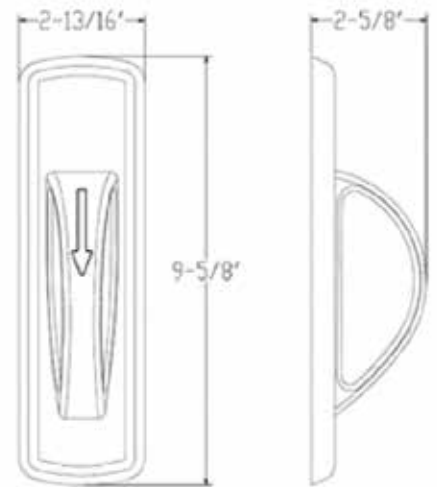

### Code Compliance

- ANSI/BHMA A156.2-2011 Grade 1 certified
- UL 10C Listed 3-Hour Fire Rating
- Meets requirements of The Americans with Disabilities Act
- Meets requirements of the Buy American Act
- OMH of New York State approved

### Important Note

If any of our keyed locks are used less cylinder, whether IC or standard, and another manufacturer's cylinder is used in place of the original manufacturer's cylinder, we request that a sample of that product be provided in advance for testing.

### Available Functions

ANSI CODE	DESCRIPTION
F-75	Passage
F-76	Privacy
F-84	Classroom
F-86	Storeroom
F-41	Single Dummy
F-72	Pair Dummy